


SE363 - CAST ALUMINUM TOEBOARD, DEPRESSED PAD

SPECIFICATIONS

The SE363 Cast Aluminum Toeboard is designed to be used with a 3/4" [19mm] depressed throwing surface formed by an aluminum shot circle embedded in the concrete pad. SportsEdge aluminum toeboards are cast from #535 ALMAG alloy with a wall thickness of 5/16" [8mm]. #535 ALMEG is an aluminum and magnesium alloy with excellent corrosion resistance. All aluminum toeboards are finished with a durable white powder coat paint. This toeboard meets all NFSHSA, NCAA, and IAAF requirements. Dimensions (below) in brackets are in centimeters.

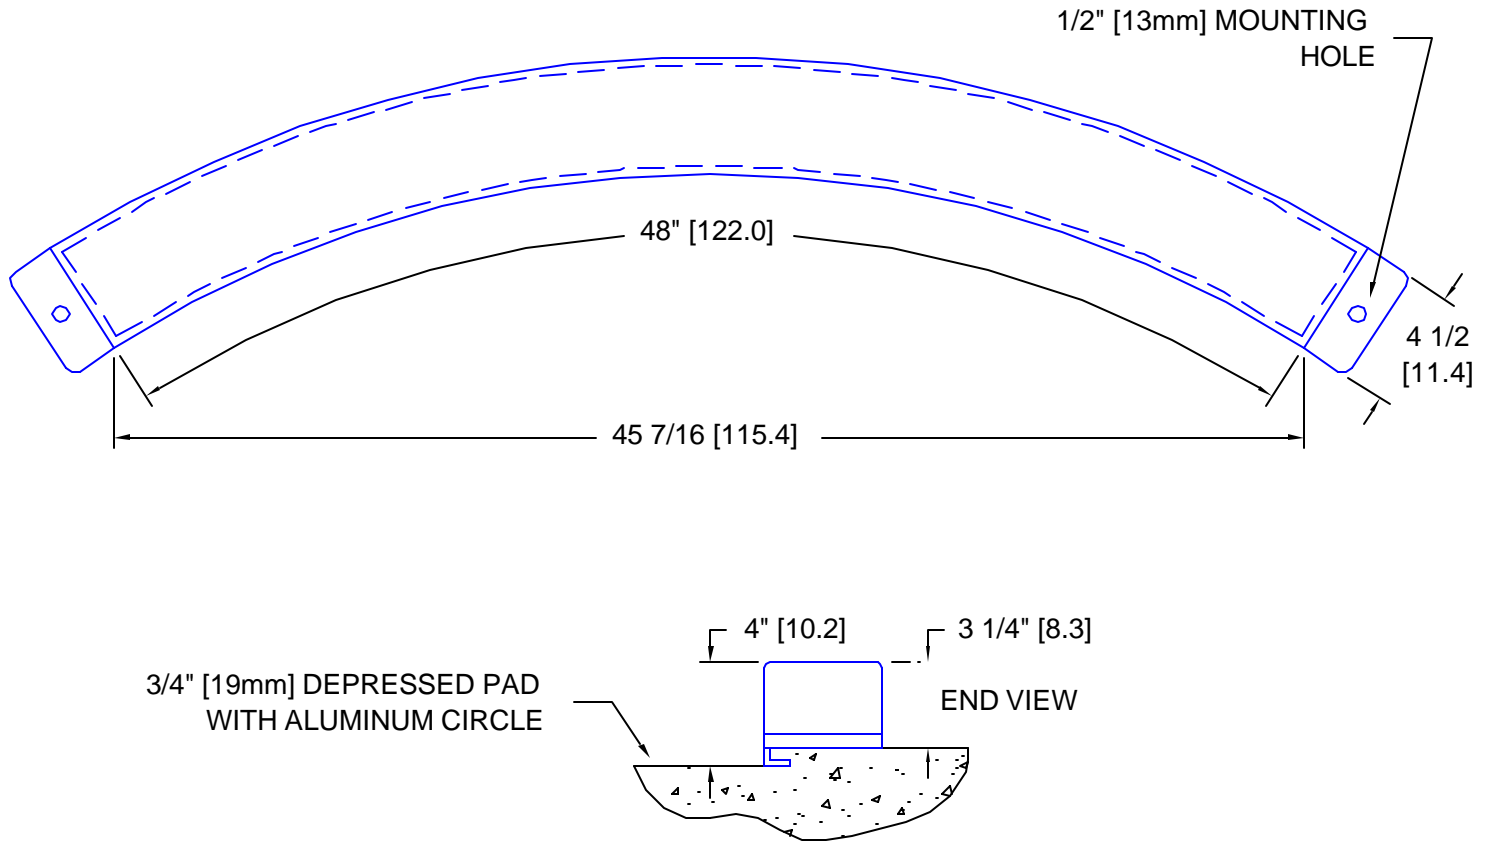

Proprietary rights of ABT, Inc. are included in the information disclosed herein. The recipient, by accepting this document, agrees that neither this document nor the information disclosed herein nor any part thereof shall be copied, reproduced or transferred to others for manufacturing or for any other purpose except as specifically authorized in writing by ABT, Inc..

SportsEdge A Division of ABT, Inc. P.O. Box 837 * 259 Murdock Road Troutman, NC 28166 800-334-6057	TITLE: SE363 Aluminum Shot Toe-Board - (Depressed Pad)		DRAWING NUMBER: SE363-1
	DRAWN BY: M.D.H.	CHECKED BY:	
SCALE: NONE	DATE: 3/17/04	A —	
<small>DISCLAIMER : The customer and the customer's architects, engineers, consultants and other professionals are completely responsible for the selection, installation, and maintenance of any product purchased from ABT, and EXCEPT AS EXPRESSLY PROVIDED IN ABT'S STANDARD WARRANTIES, ABT MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMER'S APPLICATION. Copies of ABT's standard warranties are available upon request.</small>			


SE363 - ALUMINUM TOEBOARD, DEPRESSED PAD INSTALLATION

INSTRUCTIONS

1. The SE363 toeboard is mounted to a concrete pad with a 3/4" [19mm] depressed throwing surface. The depressed pad requires either the Gill 366 or 369 Aluminum Shot/Hammer Circle shown below.
2. Using the toeboard as a template, mark the center of the holes to be drilled for the bolt anchors. Be sure the toeboard is properly positioned with the

- inside curved edge of the toeboard even with the inner edge of the ring. The toeboard must also be centered on the sector lines.
3. Drill the holes for the bolt anchors and mount the toeboard. Use 1/2" (12mm) flat washers between the toeboard and the heads of the anchor bolts. Dimensions in brackets are in centimeters.

NOTE: Toeboard must be centered on sector lines, NCAA sector shown.

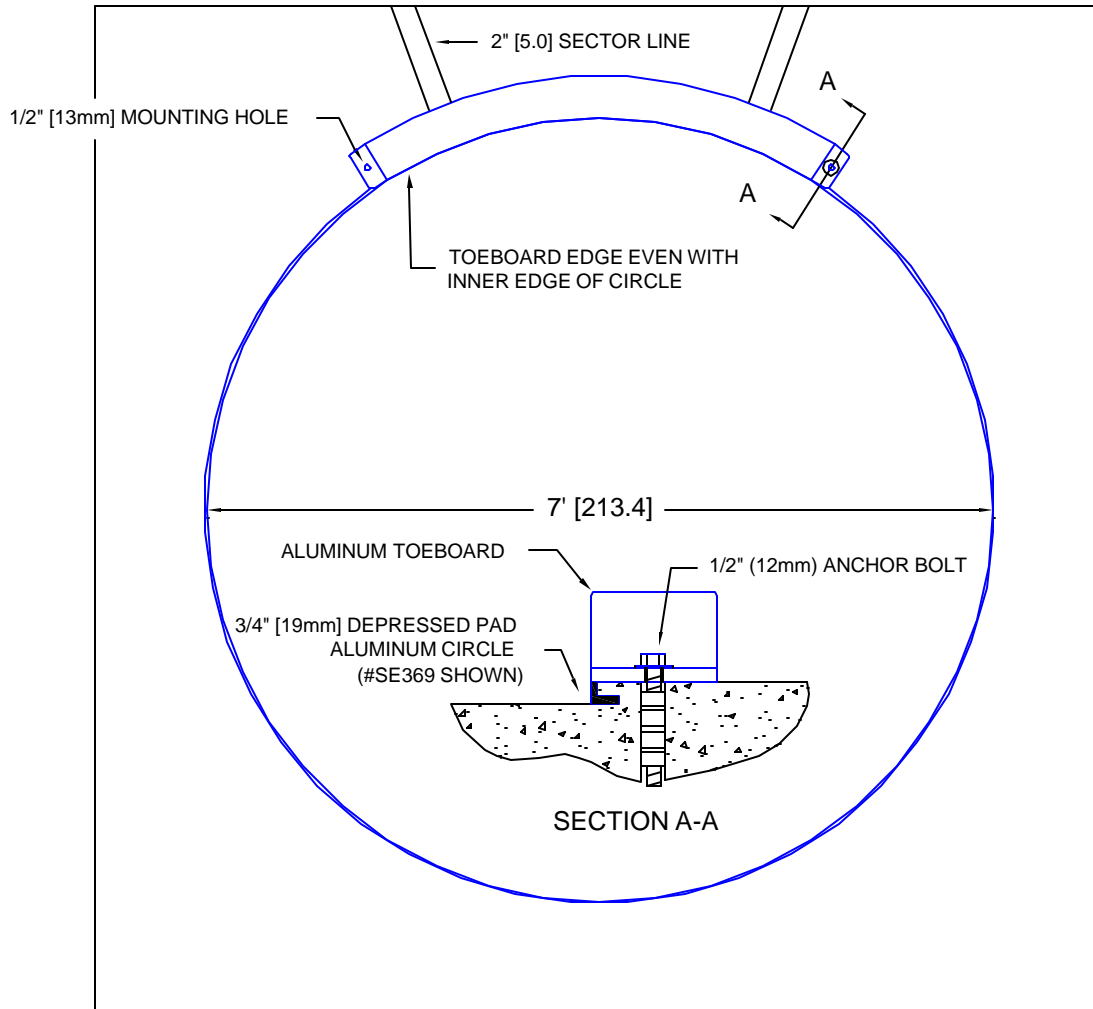

NOTICE: All installations should be done by experienced contractors and in accord with all applicable codes, laws and regulations. Suggested installation instructions herein are illustrative only and should be adapted to suit local requirements. SportsEdge is not responsible for the manner in which these products are installed.

Proprietary rights of ABT, Inc. are included in the information disclosed herein. The recipient, by accepting this document, agrees that neither this document nor the information disclosed herein nor any part thereof shall be copied, reproduced or transferred to others for manufacturing or for any other purpose except as specifically authorized in writing by ABT, Inc..

<b style="font-size: 1.2em; color: red;">SportsEdge A Division of ABT, Inc. P.O. Box 837 * 259 Murdock Road Troutman, NC 28166 800-334-6057	TITLE: SE363 - Depressed Pad Installation	
	DRAWN BY: M.D.H.	CHECKED BY:
SCALE: NONE	DATE: 3/17/04	DRAWING NUMBER: SE363-2
DISCLAIMER : The customer and the customer's architects, engineers, consultants and other professionals are completely responsible for the selection, installation, and maintenance of any product purchased from ABT, and EXCEPT AS EXPRESSLY PROVIDED IN ABT'S STANDARD WARRANTIES, ABT MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMER'S APPLICATION. Copies of ABT's standard warranties are available upon request.		