


## SE360 - WOOD TOEBOARD, LEVEL PAD

### SPECIFICATIONS

The SE360 Wood Toeboard is designed to be used on a level throwing surface with the SE372 Aluminum shot circle or the SE373 Steel Shot Circle. Optionally, a painted white line may be used to designate the throwing circle. The toeboard is fabricated from select yellow pine and sealed with two coats of white enamel paint. The SE360 toeboard meets all NFHS requirements for high school use.

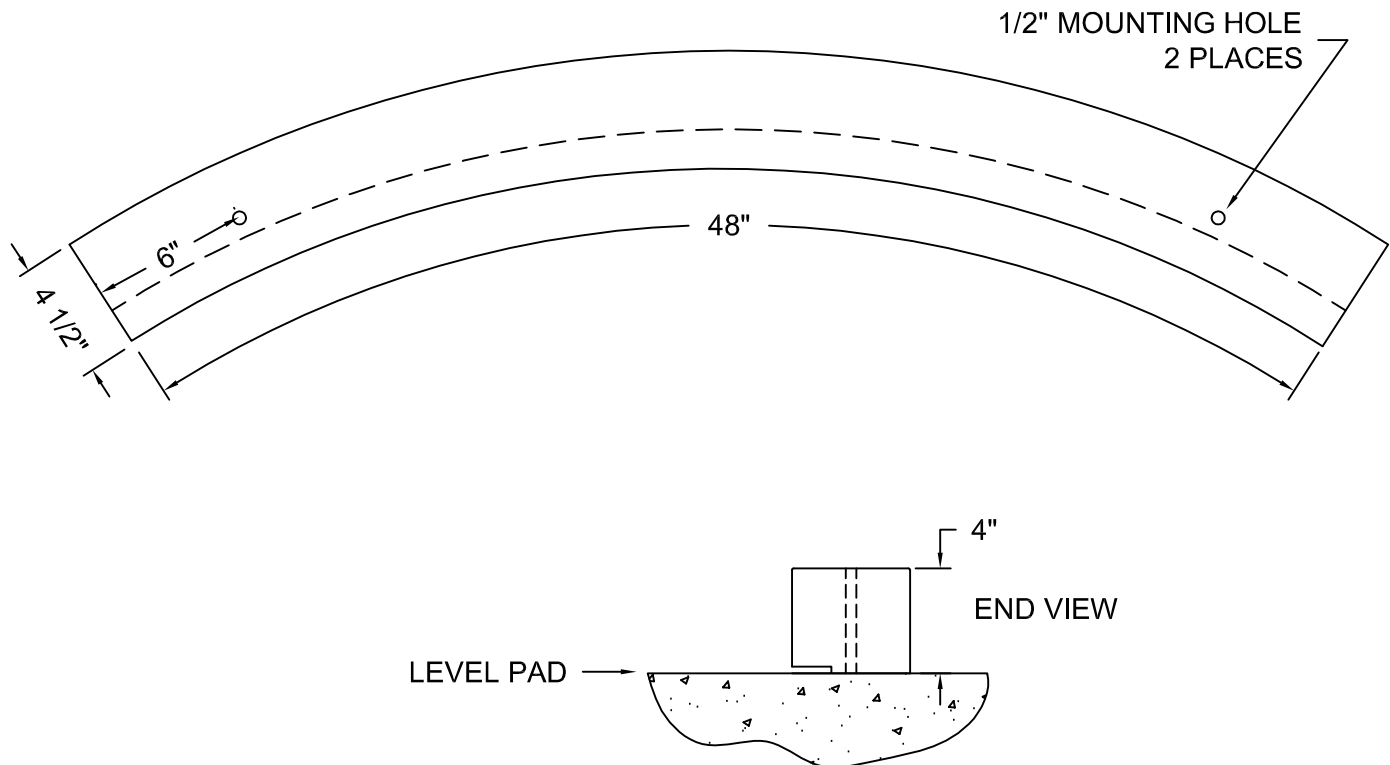

Proprietary rights of ABT, Inc. are included in the information disclosed herein. The recipient, by accepting this document, agrees that neither this document nor the information disclosed herein nor any part thereof shall be copied, reproduced or transferred to others for manufacturing or for any other purpose except as specifically authorized in writing by ABT, Inc..

**SportsEdge**

A Division of ABT, Inc.  
P.O. Box 837 \* 259 Murdock Road  
Troutman, NC 28166  
800-334-6057

**TITLE:** SE360 WOOD SHOT PUT TOE-BOARD

**DRAWN BY:** M.D.H.

**CHECKED BY:**

**SCALE:** NONE

**DATE:** 4/01/04

**DRAWING NUMBER:**

**A-**

**SE360-1**

**DISCLAIMER:** The customer and the customer's architects, engineers, consultants and other professionals are completely responsible for the selection, installation, and maintenance of any product purchased from ABT, and EXCEPT AS EXPRESSLY PROVIDED IN ABT'S STANDARD WARRANTIES, ABT MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMER'S APPLICATION. Copies of ABT's standard warranties are available upon request.

## SE360 - WOOD TOEBOARD, LEVEL PAD SE372 INSTALLATION

### INSTRUCTIONS


1. The SE360 toeboard is mounted to a flat throwing surface (pad) with a SE372 Aluminum Shot Circle, shown below, a SE373 circle (See SE360-3 for instructions) or a painted white line to designate the throwing circle.
2. Circumscribe a 7 foot diameter circle on the pad to designate the inside edge of the aluminum shot circle or 2" wide painted circle. The circle should be centered on the pad. If a painted circle is to be used, paint the circle prior to installing the toeboard.
3. Using the toeboard as a template, mark the center of the holes to be drilled for the 1/2" wedge anchors. Be sure the toeboard is properly positioned with the inside curved edge even with the inner edge of the scribed line or painted circle. The toeboard must also be centered on the sector lines.
4. Drill the holes for the bolt anchors and LOOSELY mount the toeboard in position. Lay out the aluminum

circle sections so the inside edge corresponds with the 7 foot circle on the pad and the toeboard brackets are even with the inner edge of the toeboard. Mark the ends of the toeboard and the pad where the lag screws and anchors for the circle will go. The circle will require nine 1/4" concrete anchor screws.

5. Remove the circle sections and toeboard. Drill two 5/32" pilot holes in each end of the toeboard at the marked locations. Drill nine holes in the pad for the circle concrete anchors, hole size will depend on the type of anchor you use.

6. Install two 1/2" anchors through the toeboard, and secure it in place. Use flat washers between the toeboard and the heads of the anchor bolts. Secure the circle toeboard brackets to the ends of the toeboard with the 1/4" lag screws provided. Secure the circle sections to the pad with the anchor screws.

NOTE: Toeboard must be centered on sector lines, high school sector shown.

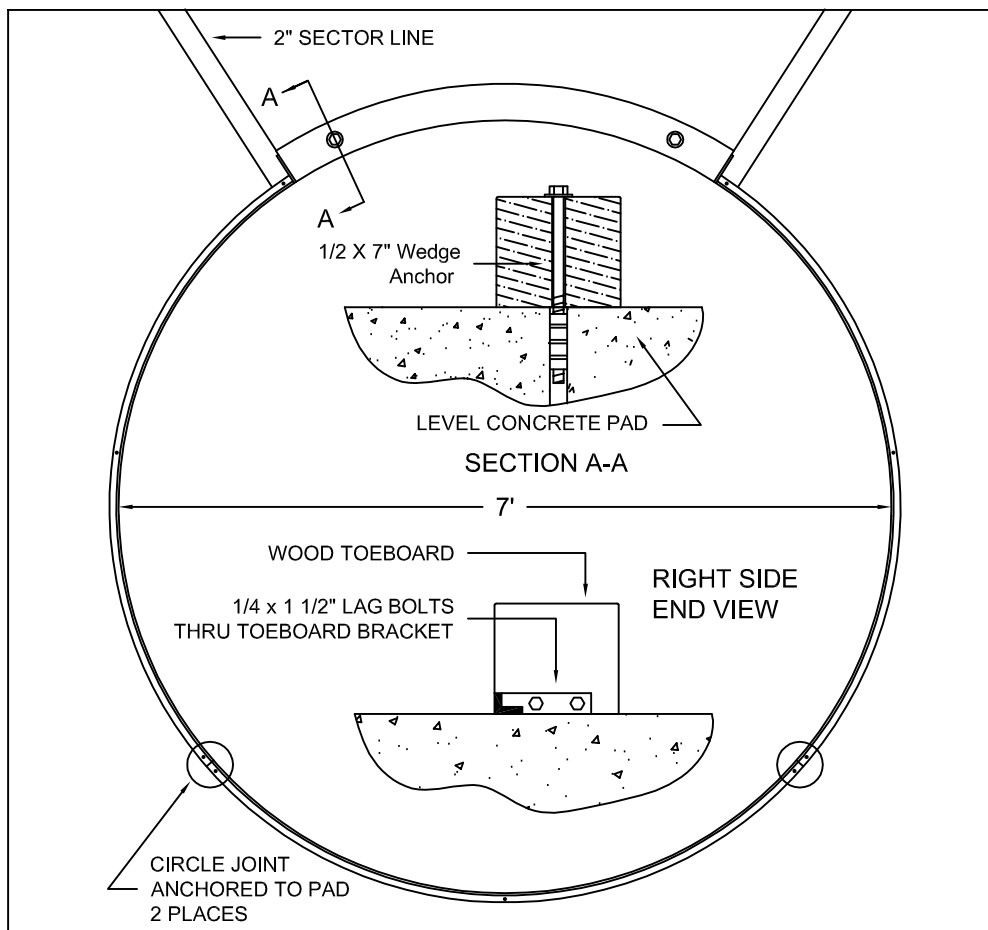

**NOTICE:** All installations should be done by experienced contractors and in accord with all applicable codes, laws and regulations. Suggested installation instructions herein are illustrative only and should be adapted to suit local requirements. SportsEdge is not responsible for the manner in which these products are installed.

Proprietary rights of ABT, Inc. are included in the information disclosed herein. The recipient, by accepting this document, agrees that neither this document nor the information disclosed herein nor any part thereof shall be copied, reproduced or transferred to others for manufacturing or for any other purpose except as specifically authorized in writing by ABT, Inc..

**SportsEdge**

A Division of ABT, Inc.  
P.O. Box 837 \* 259 Murdock Road  
Troutman, NC 28166  
800-334-6057

TITLE:

SE360 - INSTALLATION

DRAWN BY: M.D.H.

CHECKED BY:

SCALE: NONE

DATE: 4/01/04

DRAWING NUMBER:

A-

SE360-2

DISCLAIMER: The customer and the customer's architects, engineers, consultants and other professionals are completely responsible for the selection, installation, and maintenance of any product purchased from ABT, and EXCEPT AS EXPRESSLY PROVIDED IN ABT'S STANDARD WARRANTIES, ABT MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMER'S APPLICATION. Copies of ABT's standard warranties are available upon request.


# SE360 - WOOD TOEBOARD, LEVEL PAD SE373 INSTALLATION

## INSTRUCTIONS

1. The SE360 toeboard is mounted to a flat throwing surface (pad) with a SE373 Steel Shot Circle (shown below), a SE372 circle (See SE360-2 for instructions) or a painted white line to designate the throwing circle.
2. Scribe a 7 foot diameter circle on the pad to designate the inside edge of the steel shot circle or 2" wide painted circle. The circle should be centered on the pad with the two section joints to the right and left sides. If a painted circle is to be used, paint the circle prior to installing the toeboard. Note: The use of a painted circle will leave a 1/4" vertical

- gap between the inner edge of the toeboard and the pad surface.
3. Using the toeboard as a template, mark the center of the holes to be drilled for the 1/2" wedge anchors. Be sure the toeboard is properly positioned with the inside curved edge even with the inner edge of the steel circle or painted circle. The toeboard must also be centered on the sector lines.
4. Drill the holes for the wedge anchors and mount the circle and toeboard. Use 1/2" flat washers between the toeboard and the anchor nuts.

NOTE: Toeboard must be centered on sector lines, high school sector shown.

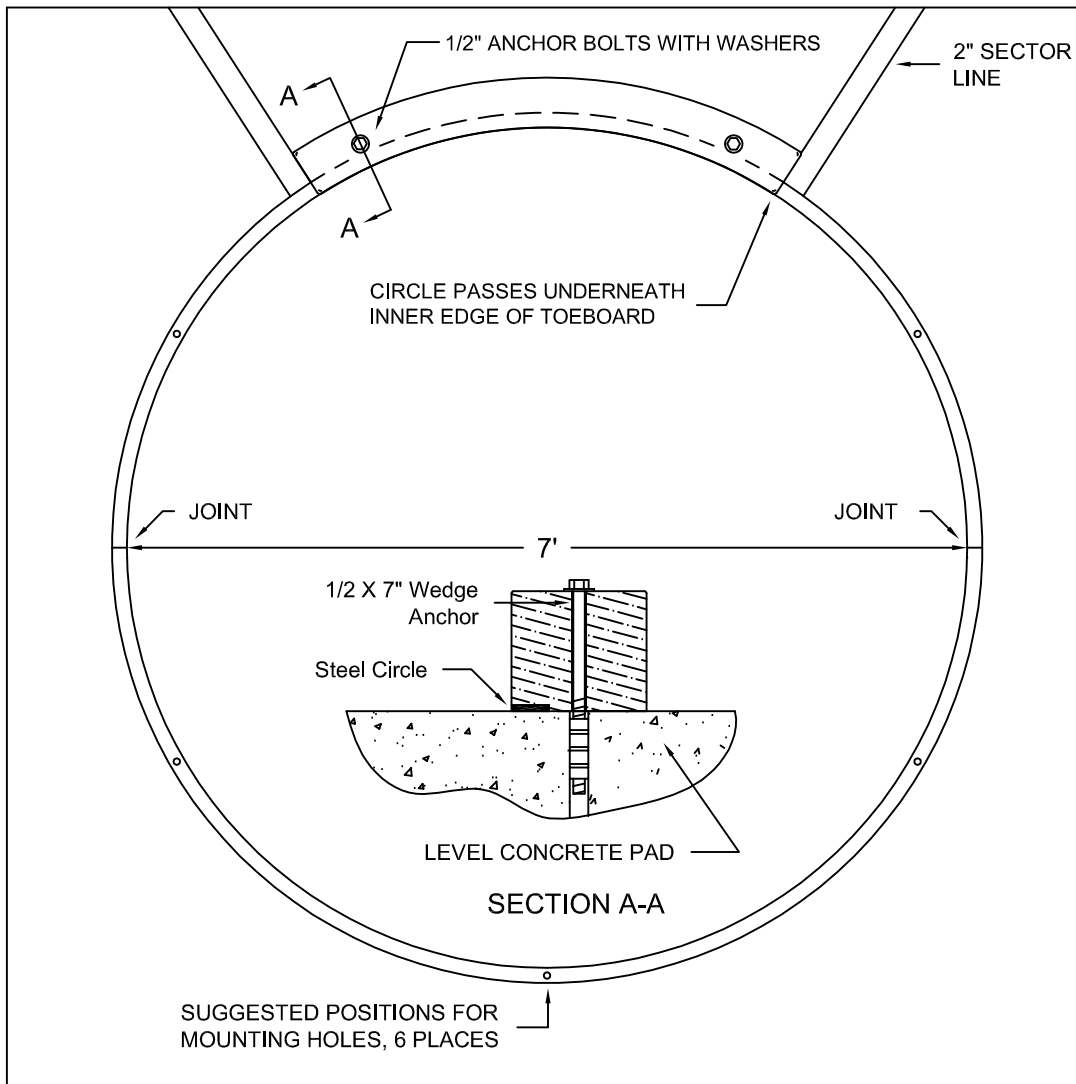

**NOTICE:** All installations should be done by experienced contractors and in accord with all applicable codes, laws and regulations. Suggested installation instructions herein are illustrative only and should be adapted to suit local requirements. SportsEdge is not responsible for the manner in which these products are installed.

Proprietary rights of ABT, Inc. are included in the information disclosed herein. The recipient, by accepting this document, agrees that neither this document nor the information disclosed herein nor any part thereof shall be copied, reproduced or transferred to others for manufacturing or for any other purpose except as specifically authorized in writing by ABT, Inc..

**SportsEdge**

A Division of ABT, Inc.  
P.O. Box 837 \* 259 Murdock Road  
Troutman, NC 28166  
800-334-6057

TITLE:

SE360 - INSTALLATION

DRAWN BY: M.D.H.

CHECKED BY:

SCALE: NONE

DATE: 4/01/04

DRAWING NUMBER:

A-

SE360-3

DISCLAIMER: The customer and the customer's architects, engineers, consultants and other professionals are completely responsible for the selection, installation, and maintenance of any product purchased from ABT, and EXCEPT AS EXPRESSLY PROVIDED IN ABT'S STANDARD WARRANTIES, ABT MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMER'S APPLICATION. Copies of ABT's standard warranties are available upon request.