
## SE506 - SKYDEX SOFT VAULT BOX INSTALLATION

## INSTALLATION OF BOX IN NEW OR EXISTING RUNWAY

SE506 SOFT BOX SHOULD BE INSTALLED SO THAT THE TOP OF THE PVC COVER IS FLUSH WITH THE FINAL RUNWAY SURFACE HEIGHT

IF INSTALLED OUTDOORS, A 1/2" DRAIN HOLE SHOULD BE DRILLED IN THE BOTTOM BACK CORNER AS NOTED. THE SAND/STONE/GRAVEL SHOULD BE PILED UP ON BOTH SIDES OF THIS AREA AS SHOWN SO THAT ONCE THE CONCRETE IS POURED THE SOFT BOX SHELL CAN DRAIN IF WATER IS PRESENT

1 X 4 CROSS BRACE - NOT TO BE REMOVED UNTIL BOX HAS BEEN SET IN CONCRETE

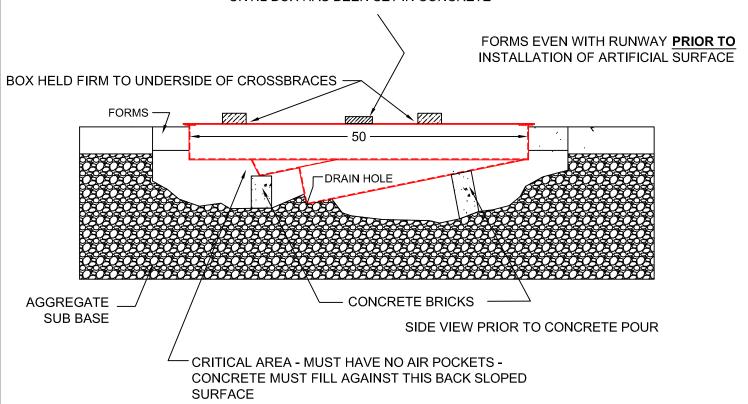

NOTE: CARE MUST BE TAKEN NOT TO TWIST OR DEFORM FIBERGLASS BOTTOM TRAY DURING INSTALLATION. PLEASE CONSULT SportsEdge 800-334-6057 IF YOU HAVE ANY QUESTIONS.

Proprietary rights of ABT, Inc. are included in the information disclosed herein. The recipient, by accepting this document, agrees that neither this document nor the information disclosed herein nor any part thereof shall be copied, reproduced or transferred to others for manufacturing or for any other purpose except as specifically authorized in writing by ABT, Inc..


SportsEdge	TITLE: SE506 Skydex Soft Vault Box						
A Division of ABT, Inc. P.O. Box 837 * 259 Murdock Road	DRAWN BY:	M.D.H.	CHECKED BY:	DRAWING NUMBER:	SE506-1		
Troutman, NC 28166 800-334-6057	SCALE:	NONE	DATE: 10/20/05	A-	SE300-1		

DISCLAIMER: The customer and the customer's architects, engineers, consultants and other professionals are completely responsible for the selection, installation, and maintenance of any product purchased from ABT, and EXCEPT AS EXPRESSLY PROVIDED IN ABT'S STANDARD WARRANTIES, ABT MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMER'S APPLICATION. Copies of ABT's standard warranties are available upon request.

## SE506 - SKYDEX SOFT VAULT BOX INSTALLATION

## INSTALLATION OF BOX IN NEW OR EXISTING RUNWAY

SPACERS TO MATCH SYNTHETIC RUNWAY THICKNESS (NOT REQUIRED IF SYNTHETIC SURFACE NOT USED)

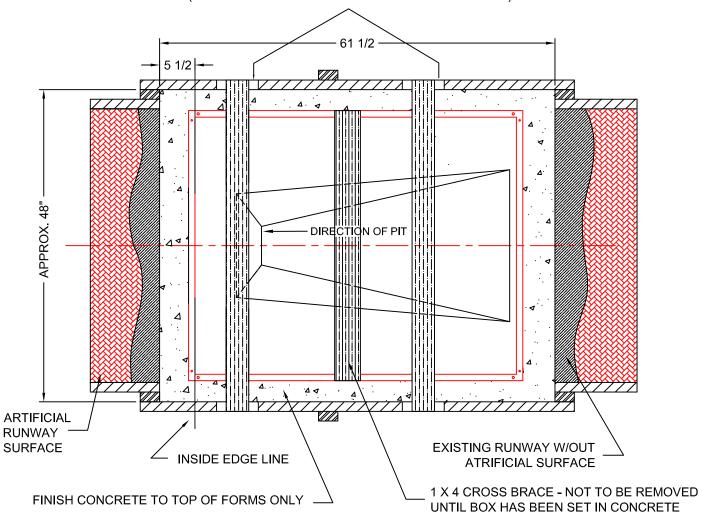

RECOMMEND A MINIMUM OF 4" OF CONCRETE AROUND THE SOFT BOX OUTER SHELL. CARE MUST BE TAKEN TO INSURE BOX IS LEVEL IN BOTH DIRECTIONS.

NOTE: CARE MUST BE TAKEN NOT TO TWIST OR DEFORM FIBERGLASS BOTTOM TRAY DURING INSTALLATION. PLEASE CONSULT SportsEdge 800-334-6057 IF YOU HAVE ANY QUESTIONS.

Proprietary rights of ABT, Inc. are included in the information disclosed herein. The recipient, by accepting this document, agrees that neither this document nor the information disclosed herein nor any part thereof shall be copied, reproduced or transferred to others for manufacturing or for any other purpose except as specifically authorized in writing by ABT, Inc..

SportsEdge	TITLE:		SE506 - I	nstallati	on
A Division of ABT, Inc. P.O. Box 837 * 259 Murdock Road	DRAWN BY:	M.D.H.	CHECKED BY:	DRAWING NUMBER:	SE506-2
Troutman, NC 28166 800-334-6057	SCALE:	NONE	DATE: 10/20/05	A-	SE300-2

DISCLAIMER: The customer and the customer's architects, engineers, consultants and other professionals are completely responsible for the selection, installation, and maintenance of any product purchased from ABT, and EXCEPT AS EXPRESSLY PROVIDED IN ABT'S STANDARD WARRANTIES, ABT MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMER'S APPLICATION. Copies of ABT's standard warranties are available upon request.